



www.rime.com.mx




Calz. de las armas 109 Int. "C",
Col. San Pedro Xalpa, Azcapotzalco,
CDMX CP. 02710.

ventas@rime.com.mx



55 2909 01 56
55 2009 14 48
55 2009 02 08

DEPENDABLE & ACCURATE MECHANICAL FLOW METERS

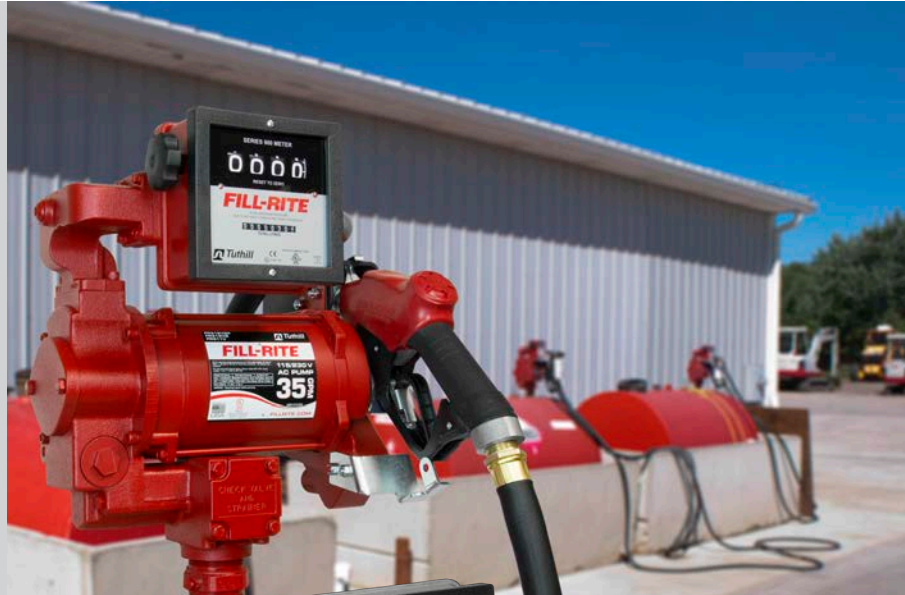

Ideal for customers who need to monitor fuel usage accurately and dependably.

The Fill-Rite® line of mechanical flow meters are designed to meet the stringent demands of customers who need to monitor fuel usage accurately and dependably. Rugged construction, easy to read numbers, and the flexibility of horizontal or vertical installations are just three features of these superior meters. Plus, all can be field calibrated for improved accuracy.



FEATURES

- **UL/cUL, CE, Ex Certifications**
- **+/- 1% accuracy on all 800 series meters, and +/- 2% accuracy on all 900 series meters.**
- **Gasoline, Diesel, B20, E15, and Kerosene Compatible**
- **Large 3 digit display on 800 series meters and 4 digit display on 900 series meters.**



806C

	Gravity Feed Models						
	806C	806CL	807C	807CL	807C1	807CL1	807CN1
Description	3 Digit (Gal)	3 Digit (L)	3 Digit (Gal)	3 Digit (L)	3 Digit (Gal)	3 Digit (L)	3 Digit (Gal)
Flow Rate (GPM/LPM)	5-20/19-75	5-20/19-75	5-20/19-75	5-20/19-75	5-20/19-75	5-20/19-75	5-20/19-75
Max Pressure (PSI/bar)	50/3.5	50/3.5	50/3.5	50/3.5	50/3.5	50/3.5	50/3.5
Inlet/Outlet	1"/1"	1"/1"	3/4"/3/4"	3/4"/3/4"	1"/1"	1"/1"	1"/1"
Housing Material	Aluminum						Nickel Plated Aluminum
Internal Construction	PPS, Stainless						PPS, Stainless
Seals	Viton® and Buna						Viton®
Compatible Fluids	Gasoline, Diesel, B20, E15, Kerosene						+ Non-Potable Water
Certifications	UL/cUL, CE, Ex						



901C

	901C	901CL	901C1.5	901CL1.5	901CN1.5
Description	4 Digit (Gal)	4 Digit (L)	4 Digit (Gal)	4 Digit (L)	4 Digit (Gal)
Flow Rate (GPM/LPM)	6 - 40/23 -151	6 - 40/23 -151	6 - 40/23 -151	6 - 40/23 -151	6 - 40 /23 -151
Max Pressure (PSI/bar)	50/3.5	50/3.5	50/3.5	50/3.5	50/3.5
Inlet/Outlet	1"/1"	1"/1"	1½"/1½"	1½"/1½"	1½"/1½"
Housing Material	Aluminum	Aluminum	Aluminum	Aluminum	Nickel Plated Aluminum
Internal Construction	Stainless Steel, Steel, Polyester and PPS				
Seals	Viton® and Buna	Viton® and Buna	Viton® and Buna	Viton® and Buna	Viton®
Compatible Fluids	Gasoline, Diesel, B20, E15, Kerosene				
Certifications	UL/cUL, CE, Ex				



901CMK4200

Meter Kits

	901CMK4200	901CLMK4200	901CMK300V	901CLMK300V	807CMK
Description	4 Digit (Gal)	4 Digit (L)	4 Digit (Gal)	4 Digit (L)	3 Digit (Gal)
Flow Rate (GPM/LPM)	6 - 40 /23 -151	6 - 40 /23 -151	6 - 40 /23 -151	6 - 40 /23 -151	5-20 /19-75
Max Pressure (PSI/bar)	50 / 3.5	50 / 3.5	50 / 3.5	50 / 3.5	50 / 3.5
Inlet/Outlet	1"/1"	1"/1"	1"/1"	1"/1"	3/4"/3/4"
Housing Material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Internal Construction	Stainless Steel, Steel, Polyester and PPS				PPS, Stainless
Seals	Viton® and Buna	Viton® and Buna	Viton® and Buna	Viton® and Buna	Viton® and Buna
Compatible Fluids	Gasoline, Diesel, B20, E15, Kerosene				
Certifications	UL/cUL, CE, Ex				



www.rime.com.mx



Calz. de las armas 109 Int. "C",
Col. San Pedro Xalpa, Azcapotzalco,
CDMX CP. 02710.

ventas@rime.com.mx



55 2909 01 56
55 2009 14 48
55 2009 02 08